



Characteristics

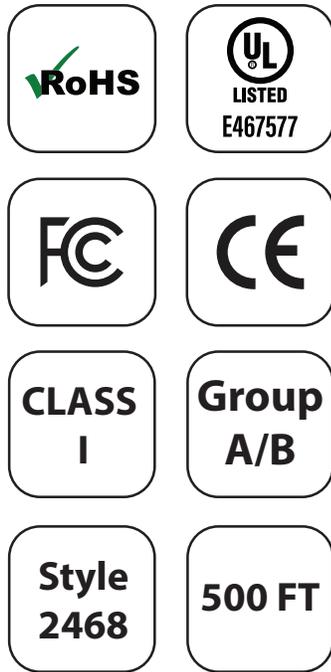

Distributed by Sunlux

- **500Ft - 18AWG Indoor LED Wire**
- PVC Protection materials up to 300V / 80°C
- Plenum 18AWG LED Sign Wire w/ 2 tinned copper conductor
- Min. Avg. Thick 15MLS
- Min. Any. Point 13MLS
- 2468 Style / Stranding 41
- Suitable for all applications other than “Wet”
- UL and ROHS compliant

Physical



Style2468	Outside Diameter	Thickness	Tounge Range
	mm	mm	mm
① Conductor	0.16	-	0.158~0.162
② PVC White	2.50	0.659	2.40~2.60
③ PVC White w/Red	5.12	0.659	5.08~5.14