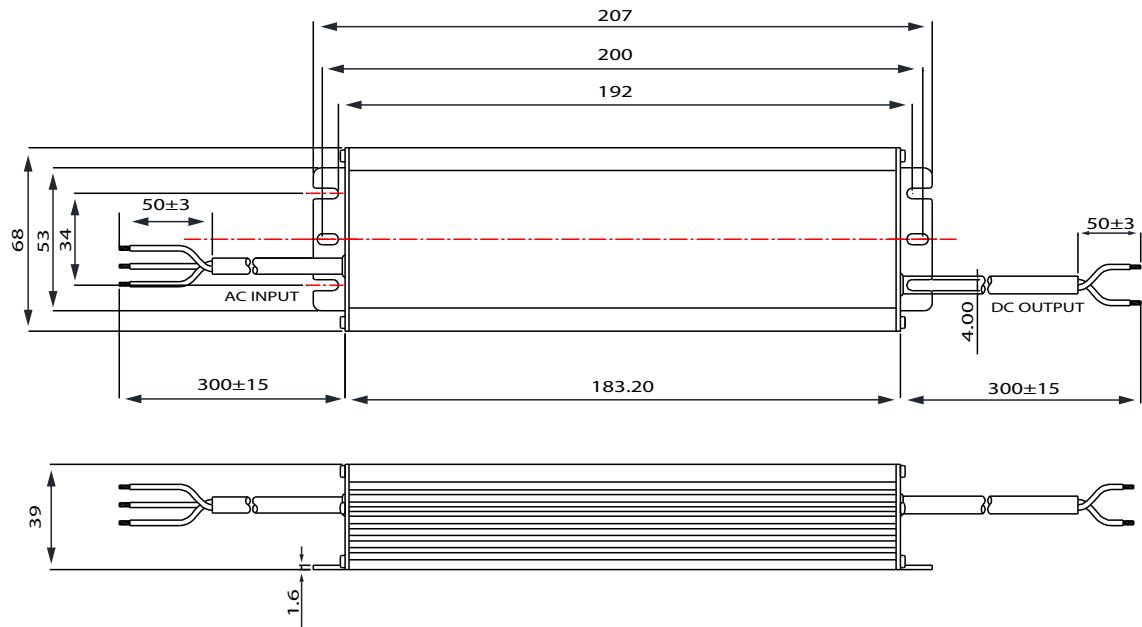


Characteristics**Constant Voltage design(C.V. mode)**

- AC input automatic voltage selection : 110-277V
- Protections:
 - Overload / Over voltage / Short circuit / Over temperature
 - IP67 design for outdoor installations
 - Dry, damp and wet locations
 - Suitable for LED lighting and moving sign applications
 - Surge immunity : Line-Line 5KV, Line-Earth 10KV
 - High power factor >0.96(230Vac & full load)
 - Metal case
 - Class P power unit
 - Safety standards : UL8750 recognized U.S. and Canada Certified
 - EMC standards : FCC Part 15


Physical**■ Dimension: unit(mm)**

Dimension : 8.14" x 2.67" x 1.53"inch (LxWxH)
Weight : 1.98 lbs.


Other Characteristics

	ITEM	LSV-150B012
INPUT	VOLTAGE RANGE	AC100~277V(min.90)
	FREQUENCY RANGE	50~60Hz
	EFFICIENCY(typ.)	91%
	AC CURRENT	2.0A Max. 110-277Vac & full load
	INRUSH CURRENT(typ.)	COLD START 75A/230VAC & full load
	LEAKAGE CURRENT	0.75mA / 277VA/50Hz
OUTPUT	DC VOLTAGE	12V
	RATED CURRENT	12.5A
	RATED POWER	150W
	RIPLE&NOISE(max.) Note1	10%
	OUTPUT OVERSHOOT	10%
	OUTPUT CURRENT TOLERANCE	±5% full load
	LINE REGULATION Note2	1%
	LOAD REGULATION Note3	3%
PROTECTION	TURN-ON DELAY TIME	1S/115Vac at full load, 0.5S/230Vac at full load
	SHORT CIRCUIT	The input power shall decrease when the output rail short, the power supply shall not be damaged
	OVER CURRENT	Hiccup mode: recovers automatically after fault condition is removed
	OVER VOLTAGE Note4	1.1-1.3 maximum load
OTHERS	OVER TEMPERATURE	90±10°C(temp. Sensor) shuts off : recovers automatically after fault condition is removed
	DIMENSION/WEIGHT	500*370*160mm ~ 900g/pcs
NOTE	1. Full load, Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1uF ceramic capacitor and a 10uF electrolytic capacitor. 2. 25°C±10°C ambient temperature, input voltage changes from 110Vac to 277Vac. 3. 25°C±10°C ambient temperature, 230Vac input, load changes from 50% to 100% 4. The product will enter hiccup status when 1.1-1.3 maximum load current applied to the output, and the product shall be self-recovery when the fault condition is removed.	

■ DERATING CURVE

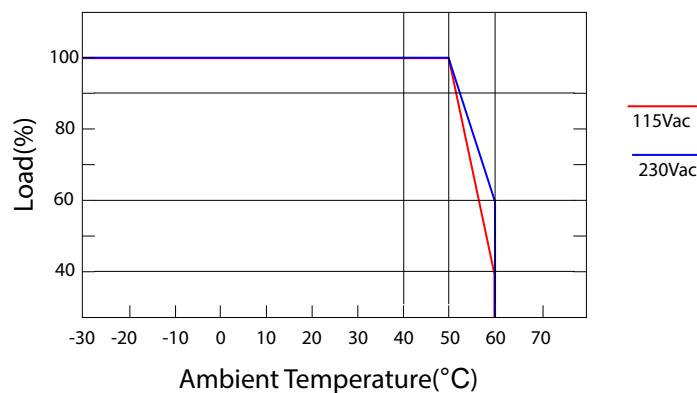


■ OUTPUT POWER VS INPUT VOLTAGE

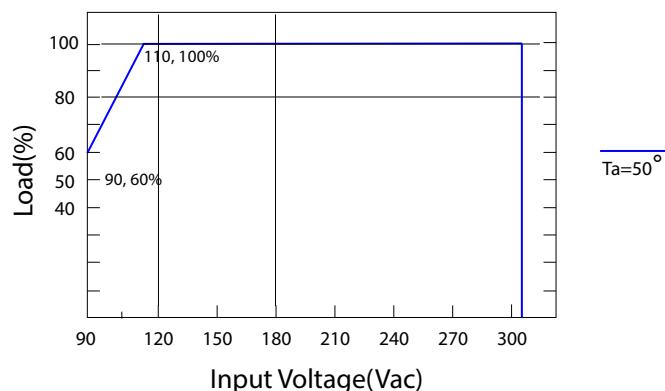


Other Characteristics (Continued)

■ EFFICIENCY VS LOAD

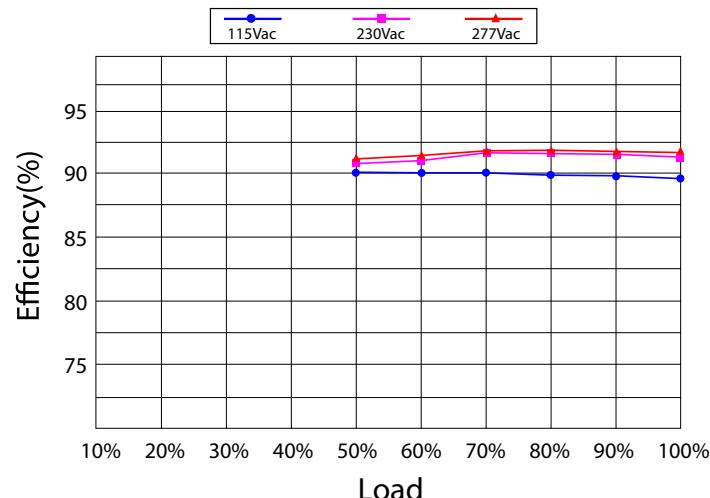

■ POWER FACTOR VS LOAD CURVE

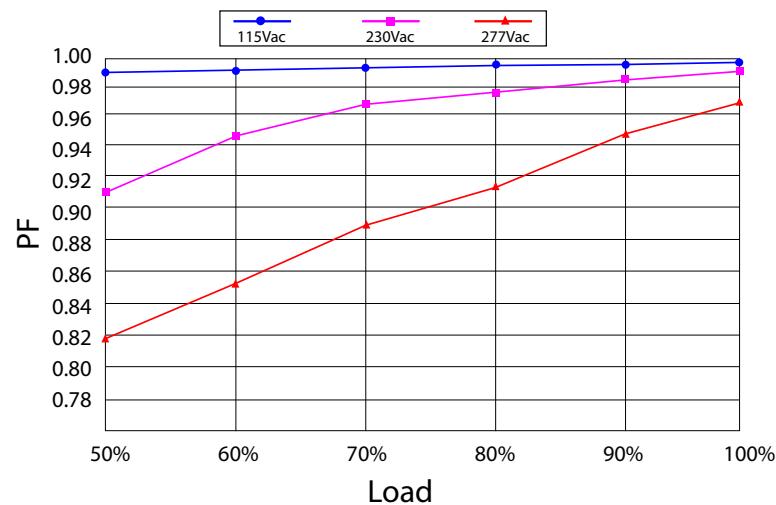

■ TOTAL HARMONIC DISTORTION VS LOAD CURVE

