
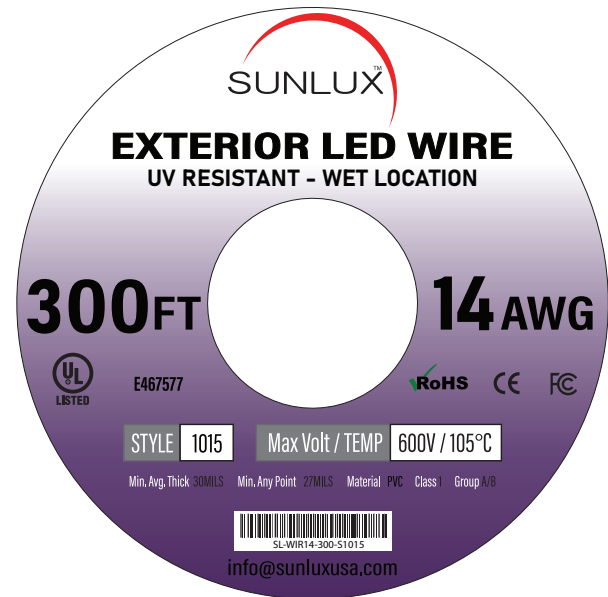



Characteristics

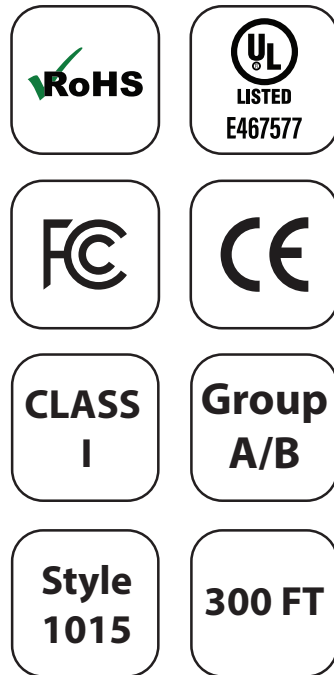

Distributed by **Sunlux**

- **300Ft - 14AWG Exterior LED Wire**
- UV Resistant protection materials up to 600V / 105°C
- Plenum 14AWG LED Sign Wire w/ 2 tinned copper conductor
- Min. Avg. Thick 30MLS
- Min. Any. Point 27MLS
- 1015 Style / Stranding 41
- Suitable for all applications
- UL and ROHS compliant

Physical



Style1015	Outside Diameter	Thickness	Tounge Range
	mm	mm	mm
① Conductor	0.16	0.254	0.252~0.256
② PVC Blue	3.42	0.770	3.30~3.55
③ PVC Red	6.90	0.770	6.75~7.05